

Windows® 7 DSD Setup Guide for JRiver MC19 (Essence One MKII)

Essence One MKII series supports DSD64 encoding rates via DoP (DSD over PCM), allowing audiophiles to indulge in digital listening at the highest possible quality levels.

The example below shows how to configure your Windows 7 PC with an Essence One MKII USB DAC using ASIO for DSD playback through JRiver Media Center:

1. Install Essence One MKII

Please follow the quick-start guide to install the Essence One MKII USB audio 2.0 driver and your Essence product. Make sure the Essence product is set as the default audio device.


2. Install JRiver MC 19 and setup ASIO mode

Please refer to Windows® 7 ASIO Setup Guide for JRiver for more details.

3. DSD playback setup

Select '**DSD in DoP format**' under Tools>Options>Settings>DSP output format

Then close the windows.

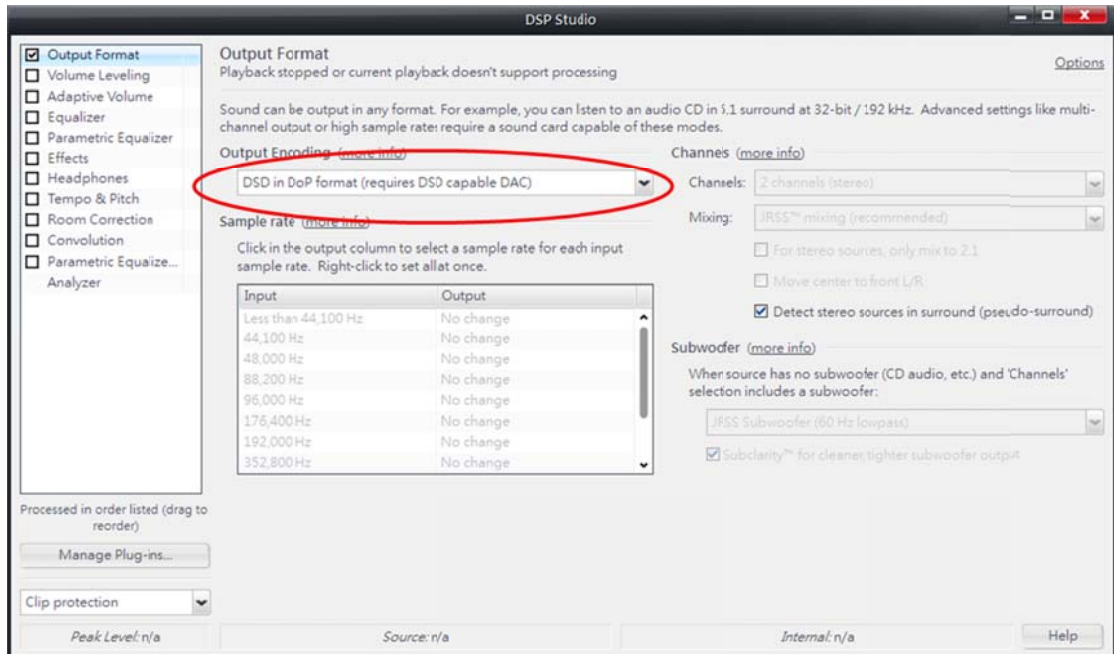

DSD audio output is now enabled .Enjoy listening!