

## ASUS T2-AH1 SATA driver installation disk

The 3.5" floppy disk contains the SATA controller driver that you need when installing Windows® 2000/XP operating system (OS).

To install the SATA controller driver during OS installation:

1. Turn the system on, enter the BIOS Setup, then set the optical drive (CD/DVD drive) as the first boot device.
2. Save your settings, exit the BIOS Setup, then restart the system.
3. Place the OS installation CD to the optical drive, then press <F6> when this screen appears.

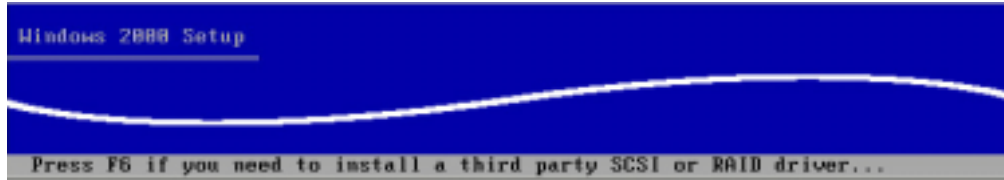


Figure 1

4. Press <S> when prompted to specify an additional device
5. When prompted, insert the floppy disk to the floppy disk drive, then press <Enter>.
6. For **Windows® 2000**: Select **ULi SATA Controller (M5287, Win2000)**, then press <Enter>.

For **Windows® XP**: Select **ULi SATA Controller (M5287, Windows XP/Server 2003)**, then press <Enter>.




Figure 2

7. Follow screen instructions to install the OS.