


PIKE 2308 REV 2.0x

Card layout

The illustration below shows the major components of the RAID card.

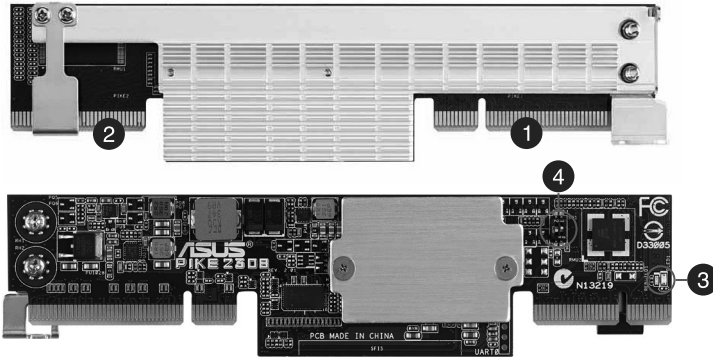

-
- 1 ASUS PIKE interface-1: PCI-E x8

 - 2 ASUS PIKE interface-2: 8-port SAS signal with SGPIO interface

 - 3 SAS RAID card status LED (lights up and blinks to indicate that the card is working normally)

 - 4 Switch

Settings

Ensure to set the switch (4) before you install your PIKE 2308 Rev 2.0x to the motherboard. Refer to the following illustration for the recommended settings:

1. For P9D-C Series, P9D-E/4L, Z9PA-D8 motherboards



2. Other supported server motherboards

