


PIKE 2308 REV 2.0x

Card layout

The illustration below shows the major components of the RAID card.

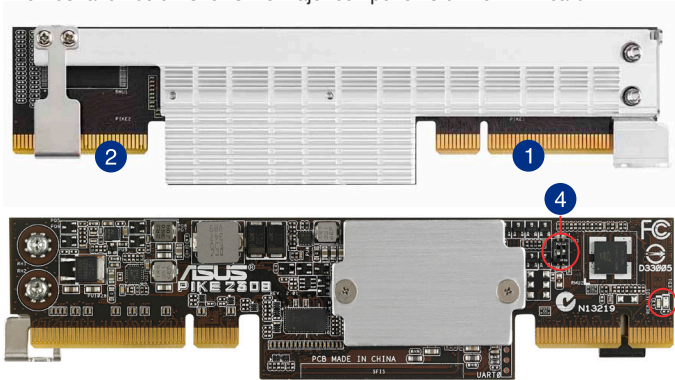

-
- 1 ASUS PIKE interface-1: PCI-E x8
-
- 2 ASUS PIKE interface-2: 8-port SAS signal with SGPIO interface
-
- 3 SAS RAID card status LED (lights up and blinks to indicate that the card is working normally)
-
- 4 Switch
-

Settings

Ensure to set the switch (4) before you install your PIKE 2308 Rev 2.0x to the motherboard. Refer to the following illustration for the recommended settings:

1. For P9D-C Series motherboards



2. Other supported server motherboards

